




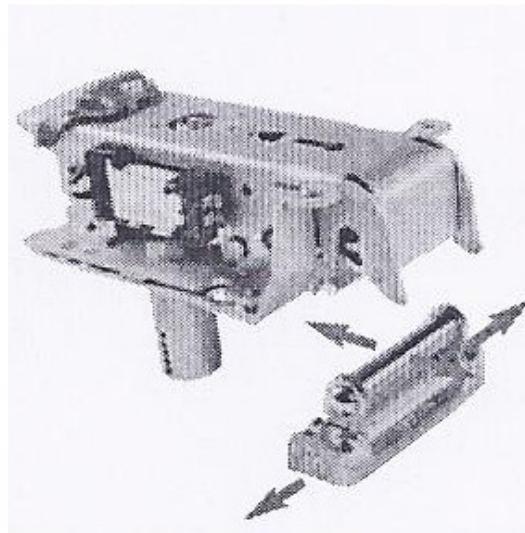

1A731-00 Cisa Elettrika gate lock

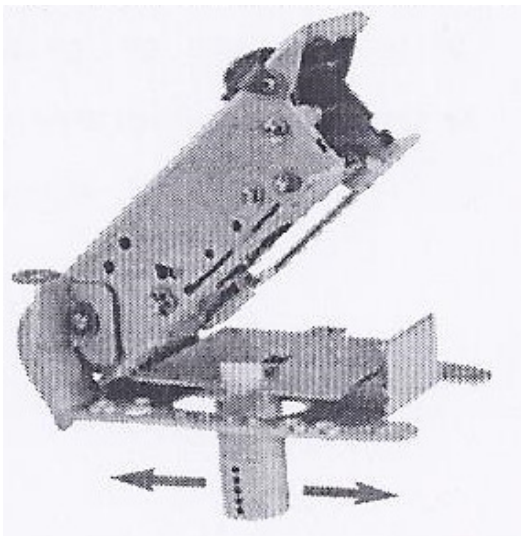

- Innovative locking system, with a "rotary hook deadbolt"
- Lockable release button on inside
- Pull resistance of up to 2000 kg
- Excellent vibration resistance and impact strength (patented system)
- Protective steel case totally enclosing the lock and striker
- Elettrika is non handed (patented system) and with a variable backset from 50 to 80 mm (patented system). Elettrika is fitted with a new type of self-adjusting "swinging rod" striker, active both vertically and horizontally (patented system)
- The rotary hook deadbolt of Elettrika can be operated in two different modes (patented system). Automatic opening: the door is set open by the deadbolt rotation. Ready to open: the deadbolt is withdrawn but the door remains in closing position
- Elettrika is interchangeable with all the types of lock available in the market
- The innovative reloading system ensures silent opening and closing operation. The gate rebound effect is reduced
- The hold open device (when selected) allows to block the lock in its open position
- Rated voltage 12VAC (3 amp)
- Weld-on back plate Included
- Tested for one million cycles
- Supplied with three keys fixing screws and fitting instructions

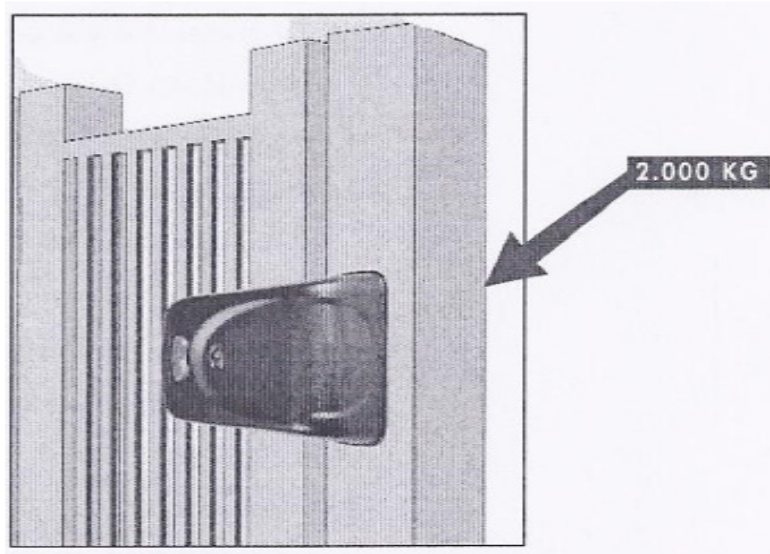

Warranty

The product is warranted against defects in material and workmanship while used in normal service for a period of 1 year from the date of sale to the original client. The Guardall policy is one of continual development and improvement, therefore Guardall reserves the right to change specifications without notice