



# SMART9458

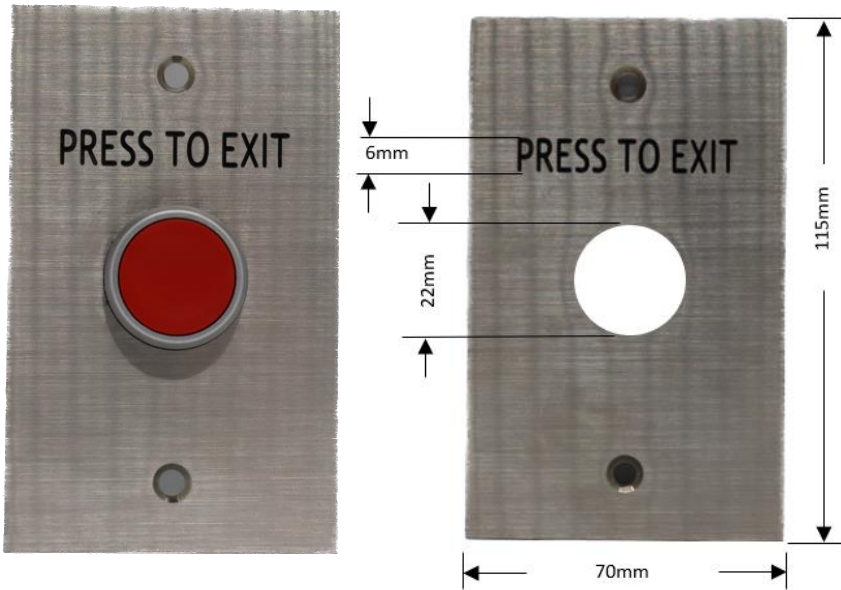

## Plate Specifications

**Plate Material :** STAINLESS STEEL  
**Plate Color :** SILVER  
**Plate style :** FLAT  
**Plate Text Printed :** "PRESS TO EXIT"  
**Plate Text Color :** BLACK  
**Plate Button Hole Cutout Size :** 22mm  
**Plate Mounting Holes :** 2  
**Plate Screw Hole Cutout Size :** 5mm  
**Plate Size :** 115Hx70Wx1.5D (mm)

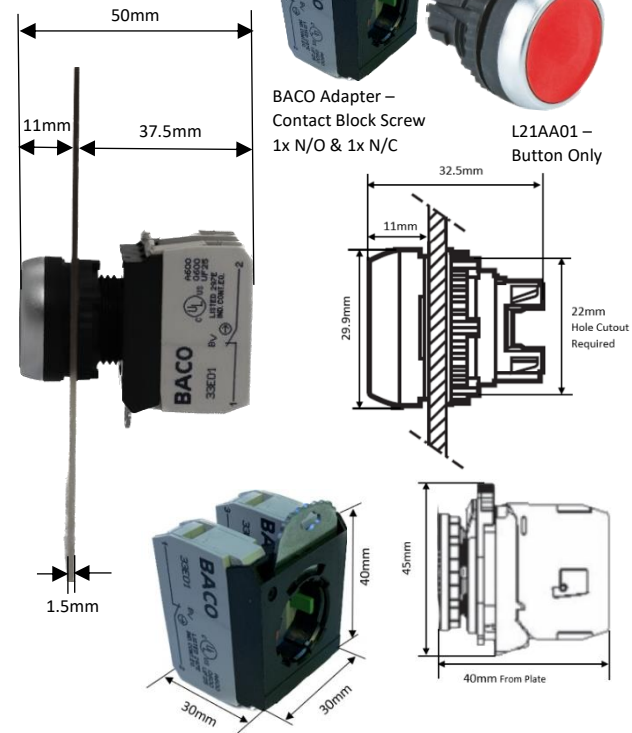

## Switch Specifications

**Series :** L21AA  
**Material :** Plastic  
**Component Type :** Pushbutton  
**Component Style :** Flush Type  
**Button Color :** RED  
**Button Diameter:** 29.9 mm  
**Mounting Cutout Hole Size :** 22 mm  
**Material – Operator :** Plastic  
**Material – Bezel :** Plastic  
**Material – Body/Housing :** Plastic  
**Material – Spring :** Stainless Steel  
**Operator Action :** Momentary  
**Coupling Pate Included :** YES  
**Contact Block Included :** YES

**IP Rating :** IP65  
**Illuminated :** NO  
**Tightening Torque Nominal :** 3 Nm  
**Relative Humidity :** 50% ~ 95% RH  
**Operating Temperature :** -25° ~ 70° C  
**Storage Temperature :** -40° ~ 70° C  
**Vibration Acceleration MAX :** 10 m/s<sup>2</sup>  
**Vibration Displacement (Peak to Peak MAX) :** 1.6 mm  
**Vibration Frequency – Operational MAX :** 100 Hz  
**Button Size :** 29.9DIA x 32.5D (mm)

**Certifications :** UL, OC/CB, BV IEC  
**Standards Compliance :** UL 508, CSA 22.2, IEC 60947-5-1, IEC 60947-5-5, IEC 60947-5-4, IEC 60068-2-6